

# → NORDIC I, II, III

## window-door systems

**Nordic** is our product line intended mostly for the Scandinavian market. Its appearance is reminiscent of wooden windows, popular in that region. Nordic is compatible with most Scandinavian window types, such as PN Beslag, IPA, and Spilka. Its construction allows for a variety of open window types such as tilt or rotary (along both the vertical and horizontal axis). This system is also helpful when it comes to the non-standard shape of windows.

### WOOD-ALU OPTION FOR OUTWARD OPENED WINDOWS

ALURON offers systems suitable for the production of wood-alu, outward opened windows. The NORDIC group is available in 3 construction variants: **NORDIC I, NORDIC II, and NORDIC III.**

#### → System features


Welded corner connection

Mechanical corner connection


Wood section thickness 56–68 mm

Glazing thickness 24–44 mm


Sash and frame profile bending

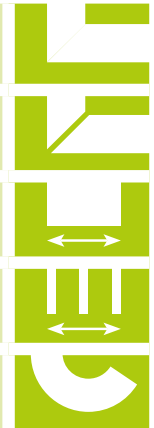


**NORDIC I** – a construction version offering the most diverse window-opening options, including rotary windows (both horizontal and vertical axis). Requires specialised milling tools.

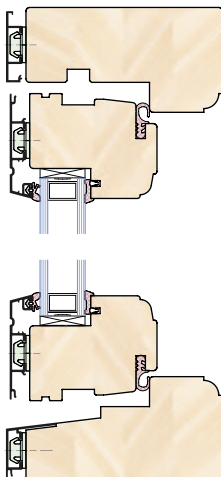

**NORDIC II** – second NORDIC version, where cladding is mounted inside the aluminium frame. Construction is based on the use of a broad aluminium profile.

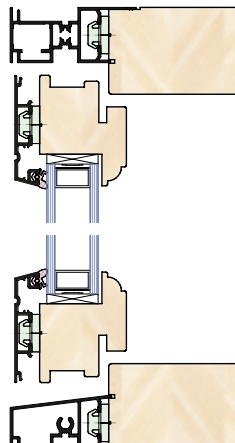

**NORDIC III** – third NORDIC version, allows for alu cladding to be mounted on top of an outward opening wooden window of standard construction. Does not require specialised milling.

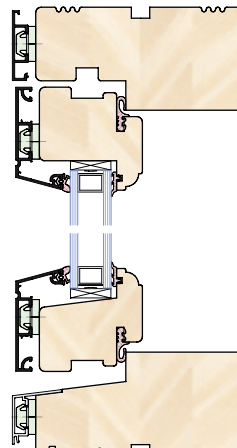

NORDIC II



NORDIC III