


Standard ironmongery:



Curved Sash Lift

- Aesthetic curves
- Ergonomically designed with thumb recesses
- Narrower depth plate than some traditional designs
- Fits on the bottom sash rail
- Designed to assist lifting the sash window up and down



Narrow Fitch Fastener


- Traditional fastener
- Suitable for double-glazed windows
- Designed to pull, roll and align the meeting rails together
- Supplied with locking version only
- Locking narrow loop: 12.5mm
- Non-locking narrow loop: 12.5mm

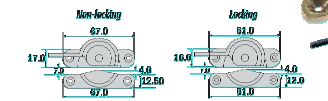




Standard Curved Wheel Pulley

- Full bearing pulleys
- Recommended for use in most sash windows
- Max. sash weight: 75kg
- Rope size: 1 x 1/8" / 22.5 x 118mm
- Wheel diameter: 152 / 60mm
- Bore: 33mm
- Use white cord
- Wheel type: Brass, Curved


* PL1014 PPS and PL1017 PPS are manufactured from 316 marine grade Stainless Steel




Vertical sections

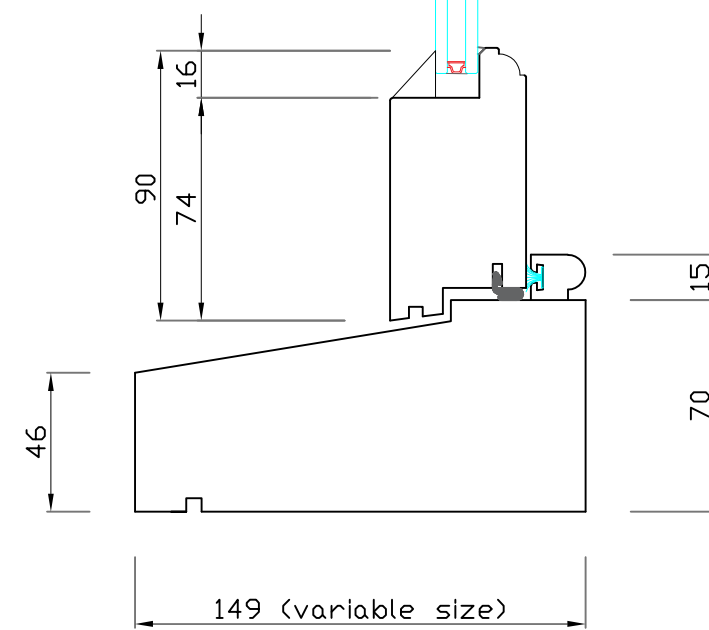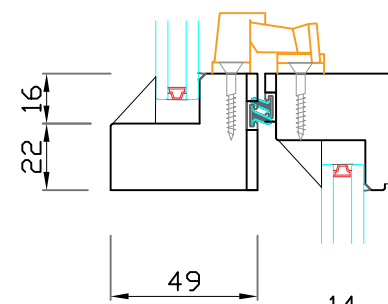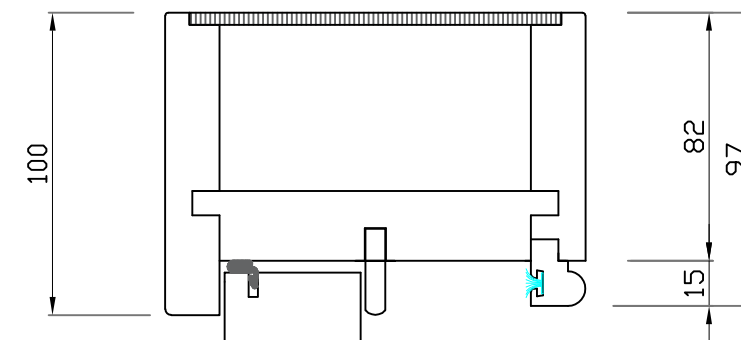


Horizontal sections

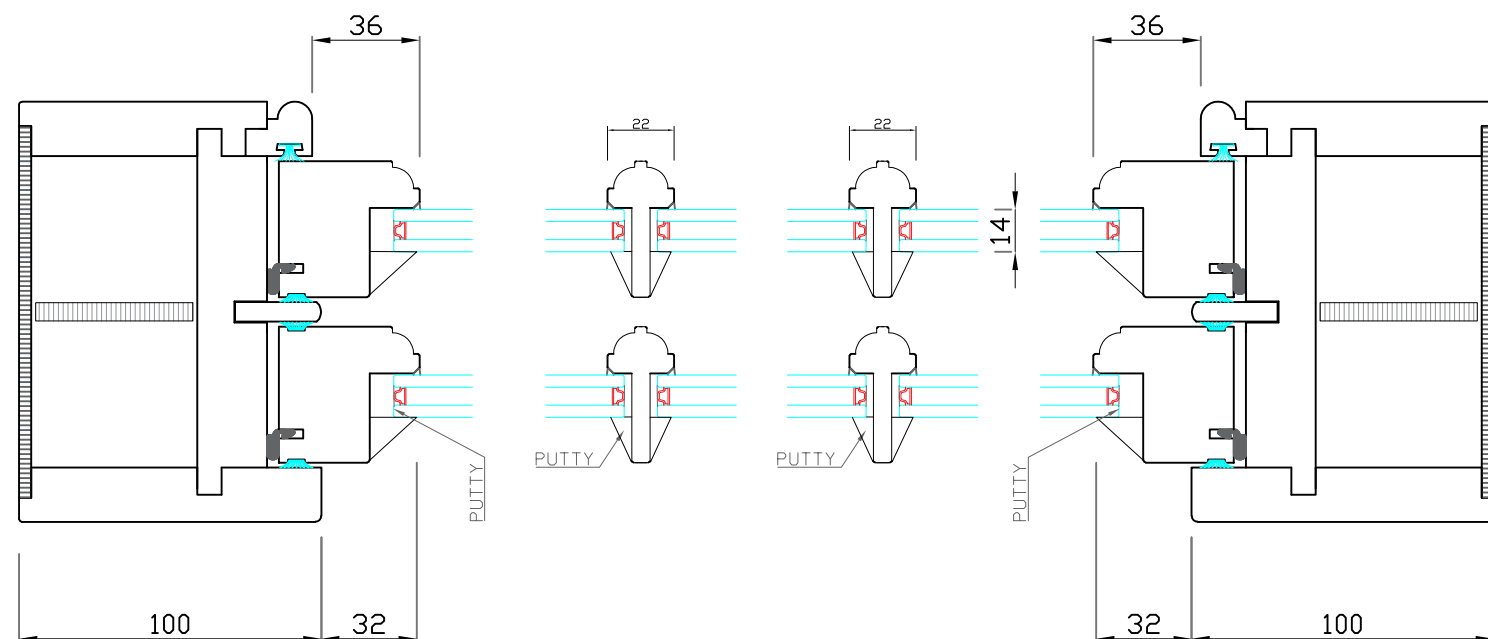

Standard ironmongery finish

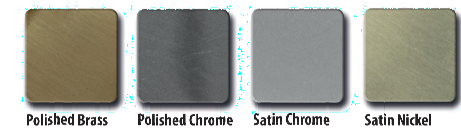

Optional ironmongery finish

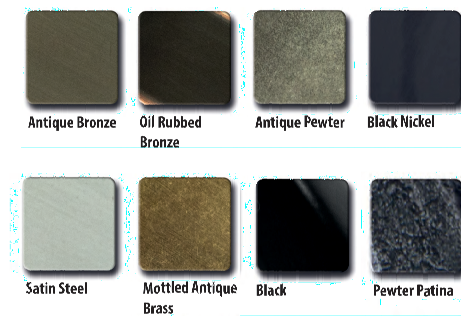

NOTE: All dimension in millimeters

Global Doors And Windows LTD

Unit 4, Riverside Business Park
16 Lyon Road, South Wimbledon
London, SW19 3RL
info@globaldoorsandwindows.com
telephone 02085403833
mobile 07800601561



DRAWING TITLE:
Slim Line Sash Window – details

PROJECT:

DRAWING NO. GDW_SS01 DRW: ZW

DATE: 14.12.18 SCALE: 1:2.5 SIZE: A3

