




Vertical cross section

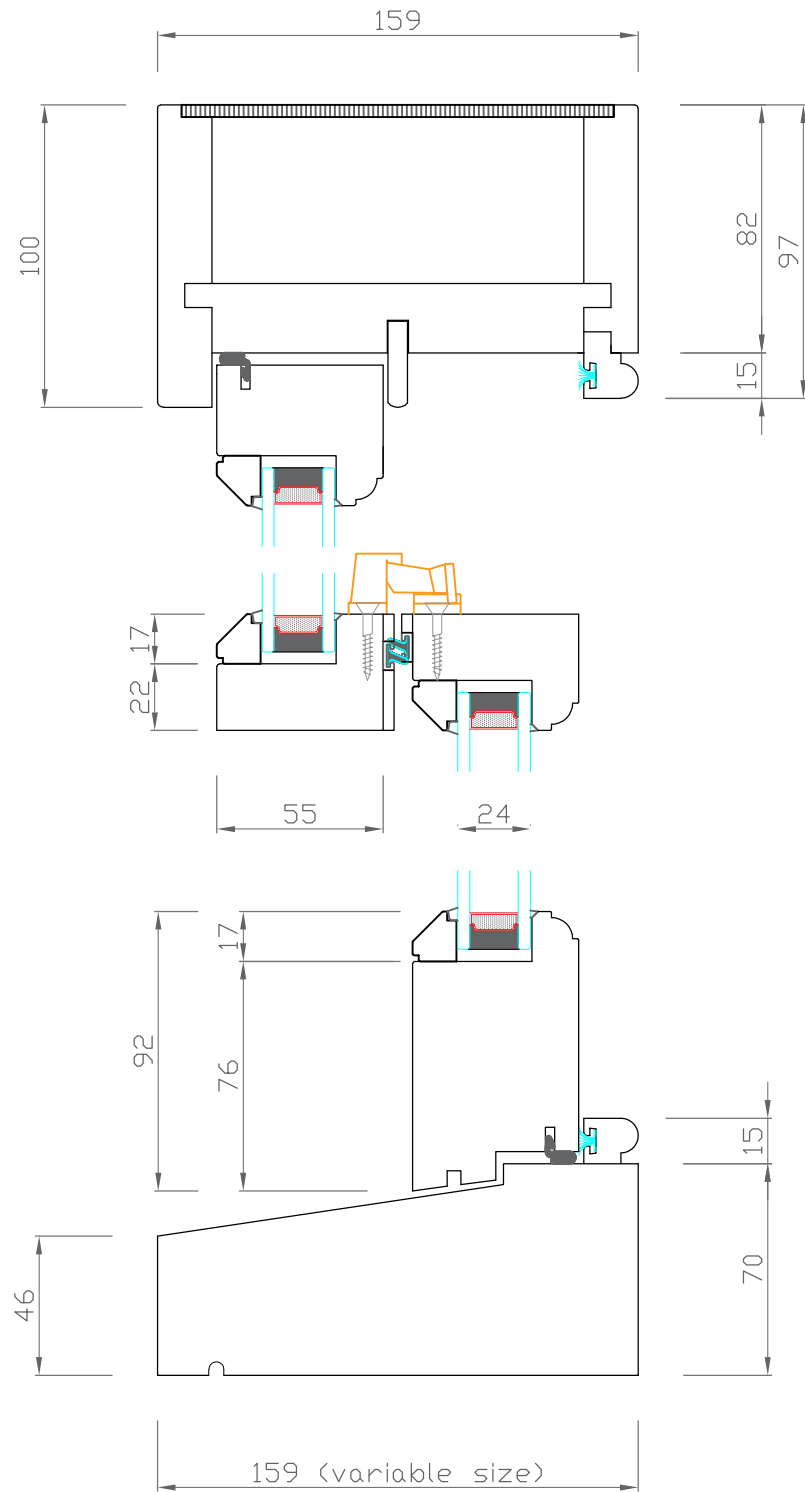


Horizontal cross section

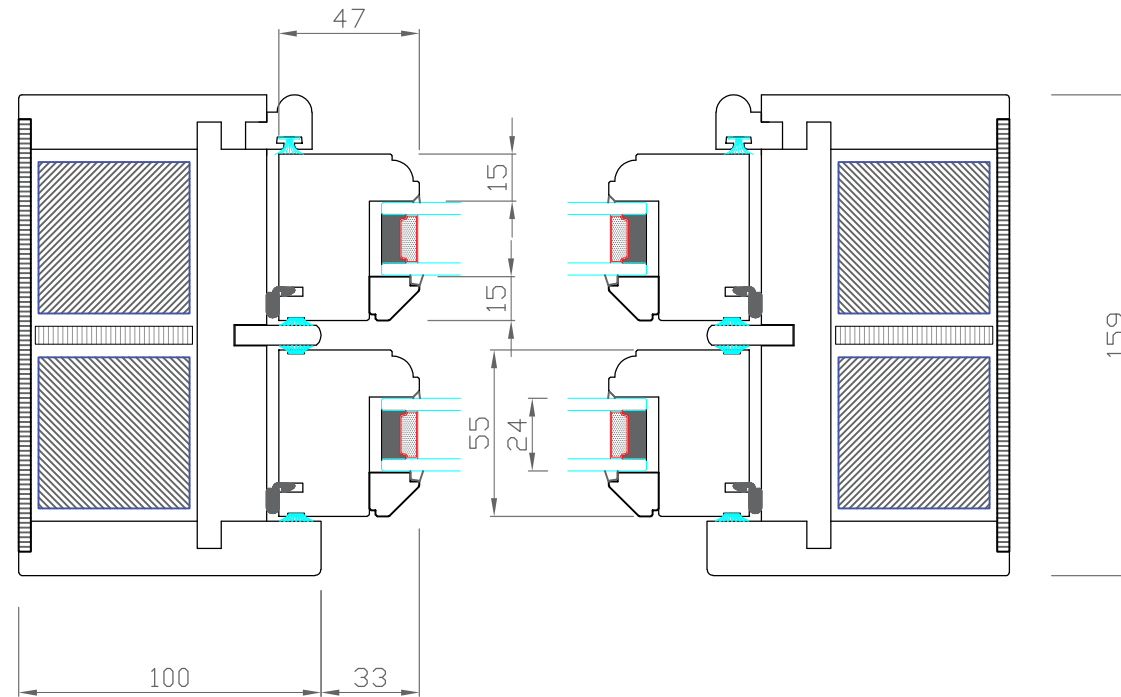

Glazing bead and stick on bars moulding cross section

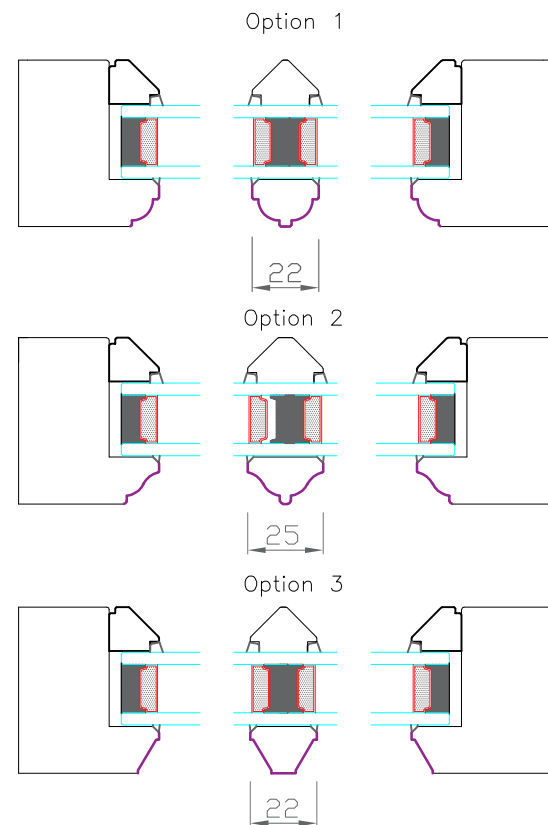


Standard external horn

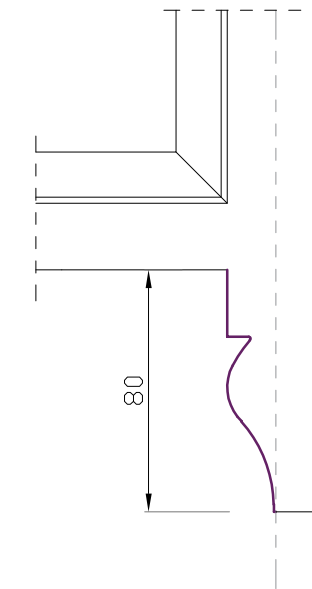

Standard ironmongery:


Curved Sash Lift

- Aesthetic curves
- Ergonomically designed with thumb recesses
- Narrower depth than some traditional designs
- Fits on the bottom sash rail
- Designed to assist lifting the sash window up and down



Narrow Fitch Fastener


- Traditional fastener
- Suitable for double-glazed windows
- Designed to pull, roll and align the meeting rails together
- Supplied with locking system only
- Locking narrow loop: 12mm
- Non-locking narrow loop: 12.5mm




Standard Curved Wheel Pulley

- Full bearing pulleys
- Recommended for use in most sash windows
- Max. sash weight: 75kg
- Frame sizes: 1 x 416/225.4 x 118mm
- Wheel diameter: 152/76mm
- Recess: 37mm
- Use white cord
- Wheel type: Brass, Curved


* PL024, PPS5 and PPS7/2/PS5 are manufactured from 316 marine grade Stainless Steel



Standard ironmongery finish

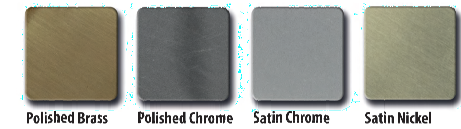

Optional ironmongery finish

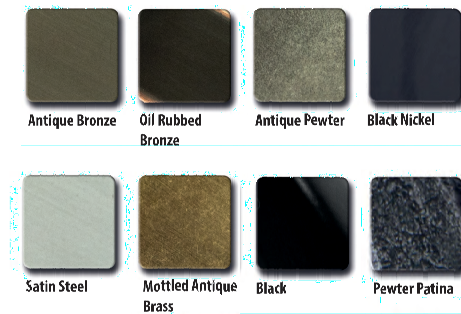

NOTE: All dimension in millimeters

Global Doors And Windows LTD

Unit 4, Riverside Business Park
16 Lyon Road, South Wimbledon
London, SW19 3RL
info@globaldoorsandwindows.com
telephone 02085403833
mobile 07800601561



DRAWING TITLE:
Lead Weights Box Sash Window – details

PROJECT:

DRAWING NO. GDW_SS01 DRW: ZW

DATE: 14.12.18 SCALE: 1:2½ SIZE: A3

