



euroslide

In-line patio door system

eurocell[®]

All together better

euroslide

In-line patio door system



Features and benefits

- ▶ 2, 3 or 4 pane options
- ▶ Ventilation can be fitted
- ▶ Anti-lift device prevents panes being lifted by intruders
- ▶ Full Eurogroove where applicable to accept most kinds of suitable hardware
- ▶ Separate chambers for improved drainage, thermal-efficiency and strength
- ▶ 28mm glazing as standard
- ▶ Fully bevelled for a slim visual profile and clean sight lines
- ▶ Can be directly butted up to the Eurocell **eurologik70**
- ▶ Internally glazed for improved security
- ▶ Fusion welded joints
- ▶ Patented knock-in 45° putty-line and scotia bead
- ▶ Pre-gasketed sash reduces fabrication time
- ▶ Robust steel and aluminium reinforcing sections

Energy efficiency

Eurocell is constantly innovating to ensure that our PVC-U doors continue to meet the demands of ever-changing environmental and safety requirements – helping you to design the secure, sustainable buildings of tomorrow. The Eurocell **euroslide** in-line patio door system can achieve **u-values from 1.8-1.2**. Door Energy Ratings (DERs) can also be calculated.


At Eurocell we have BFRC-certified simulators who are fully qualified to calculate DERs and give advice on requirements for compliance. For more information, please contact our technical department.

Accreditations


BS 6375 Part One

Classification for weathertightness and guidance on selection and specification

Double glazed

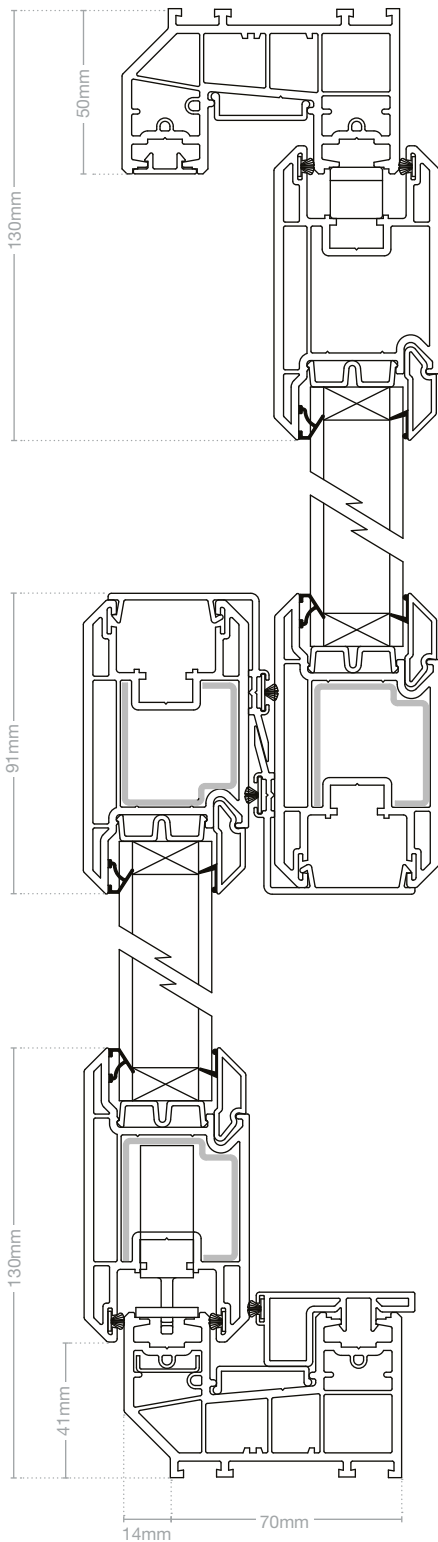

Double glazed
Fixed sash, midrail

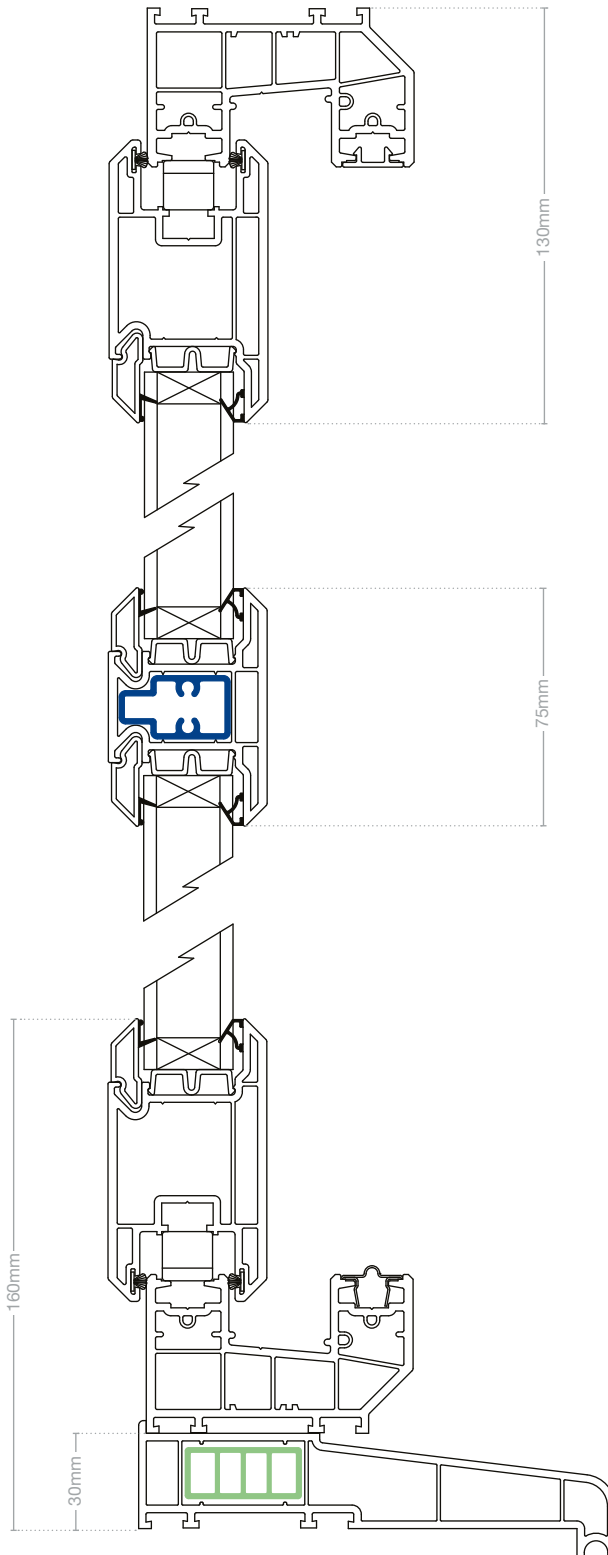

Patio door profile
colour options



White



Golden Oak



Rosewood



Irish Oak*



Black Ash*



Grey*



Cream*

* These colours are available on extended lead times.

Special colours are also available on extended lead times



All together better

For more information about our in-line patio door system – call our customer services team on **0800 988 3047**, or visit **eurocell.co.uk**

Eurocell plc, Fairbrook House, Clover Nook Road, Alfreton, Derbyshire DE55 4RF

